

Compact Balances

# EJ

Series



EJ-1500



EJ-120

*The EJ Series compact balances are specifically designed for on-line and catalog sales. Their performance and functions are also ideally suited for the education market.*

- Unique and eye-catching color design.
- Hygienic and rustproof stainless steel pan.
- Supports multiple weighing units.
- Slot in the rear for an anti-theft lock.
- Stackable body to save storage space.
- Calculates density automatically.\*

\* The optional density determination kit (EJ-13) is required.



Stackable body



**A&D** ...Clearly a Better Value  
A&D Company, Limited  
<http://www.aandd.jp>

# Compact Balances *EJ* Series

## Specifications

	EJ-120	EJ-200	EJ-300	EJ-410	EJ-610	EJ-1500	EJ-2000	EJ-3000	EJ-4100	EJ-6100	
Weighing capacity	120 g	210 g	310 g	410 g	610 g	1500 g	2100 g	3100 g	4100 g	6100 g	
Min. weighing value	0.01 g					0.1 g					
Weighing units	g, pcs, %, oz, lb, ozt, ct, mom, dwt, GN, N, SG (density), tola*, tael (HG, HJ, T)*										
Counting mode	Max. count**	12,000 pcs	21,000 pcs	31,000 pcs	41,000 pcs	61,000 pcs	15,000 pcs	21,000 pcs	31,000 pcs	41,000 pcs	61,000 pcs
	Min. unit weight**	0.01 g					0.1 g				
	No. of samples	5, 10, 25, 50 or 100 pieces									
Percent mode	Min. % display	0.1%									
	Min. 100% weight	1 g					10 g				
Repeatability (Standard Deviation)		0.01 g					0.1 g				
Linearity		±0.01 g		±0.02 g		±0.03 g		±0.1 g		±0.2 g	±0.3 g
Sensitivity drift		±20 ppm/°C (10°C to 30°C / 50°F to 86°F)									
Display type		7-segment LCD with backlight (character height 16 mm)									
Display refresh rate		10 times per second									
Operating temperature		-10°C to 40°C / 14°F to 104°F, 85%RH or less (no condensation)									
Power supply		AC adapter or 4 AA batteries									
Battery operation		Approximately 70 hours (backlight off, alkaline batteries)									
Calibration mass**		100 g	200 g	300 g	400 g	600 g	1500 g	2000 g	3000 g	4000 g	6000 g
Weighing pan size		ø110 mm					127 mm x 140mm				
Net weight		Approximately 850 g					Approximately 970 g				

\* For special versions only. One of them can be selected and installed at the factory.

\*\* Factory setting

## Options

### EJ-13



### EJ-11




- EJ-02** Quick USB interface
- EJ-03** RS-232C interface
- EJ-07** Underhook for EJ-3000 / EJ-4100 / EJ-6100
- EJ-08** Underhook for EJ-1500 / EJ-2000
- EJ-11** Breeze break
- EJ-12** Carrying case
- EJ-13** Density determination kit for EJ-120 / EJ-200 / EJ-300 / EJ-410 / EJ-610




EJ-12

## Dimensions (mm/inches)

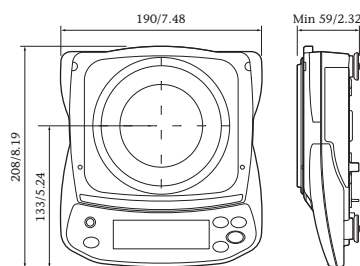

EJ-120/200/300/410/610

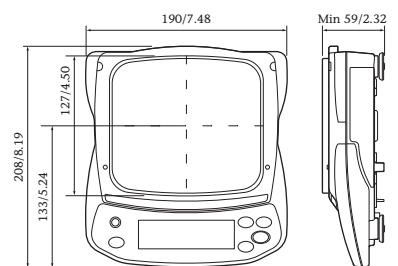

EJ-1500/2000/3000/4100/6100

# AND

...Clearly a Better Value

### A&D Company, Limited

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone:[81](3) 5391-6132 Fax:[81](3) 5391-1566  
http://www.aandd.jp

### A&D ENGINEERING, INC.

1756 Automation Parkway, San Jose, CA 95131 U.S.A.  
Telephone:[1](408) 263-5333 Fax:[1](408) 263-0119

### A&D Australasia Pty Ltd.

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone:[61](8) 8301-8100 Fax:[61](8) 8352-7409

### A&D INSTRUMENTS LTD.

Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY UNITED KINGDOM  
Telephone:[44](1235) 550420 Fax:[44](1235) 550485

### <German Sales Office>

Hamburger Straße 30 D-22926 Ahrensburg GERMANY  
Telephone:[49](0) 4102 459230 Fax:[49](0) 4102 459231

### A&D KOREA Limited

817, Manhattan Bldg., 33, Gukjegeumyung-ro 6-gil,  
Yeongdeungpo-gu, Seoul, 07331, KOREA  
Telephone:[82](2) 780-4101 Fax:[82](2) 782-4280

### A&D RUS CO., LTD.

Vereyskaya str.17, Moscow, 121357 RUSSIA  
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

### A&D Instruments India Private Limited

509 Udyog Vihar Phase V  
Gurgaon-122 016, Haryana, INDIA  
Telephone:[91](124) 471-5555 Fax: [91](124) 471-5599